




	! " #	\$! % & '	! () % * +	, -	. /
G		0 &	$V_{GS(th)}$ $V_{DS}=10V$ $I_D=1mA$ $V_{DS}=V_{GS}$ $I_D=250\mu A$	1 2 3	4 5 6
			7 8 9 : ; < = > ? @ A < = B C	D E	4 5 6



SOT-23 F G G H N I J MOS K L M N ON-CHANNEL MOSFET in a SOT-23 Plastic Package.

P Q % R - S T U V W X Y Z % [\ V W O] V ^ _ ` O < = B C O
Sensitive gate trigger current and Low Holding current.ESD protected up to 1KV. HF product.


a b c d % e f X g h R - O
Intended for use in general purpose switching and phase control applications.



PIN1 i G PIN 2 i S PIN 3 i D


Marking	H702
---------	------

Rev.I May.-2022

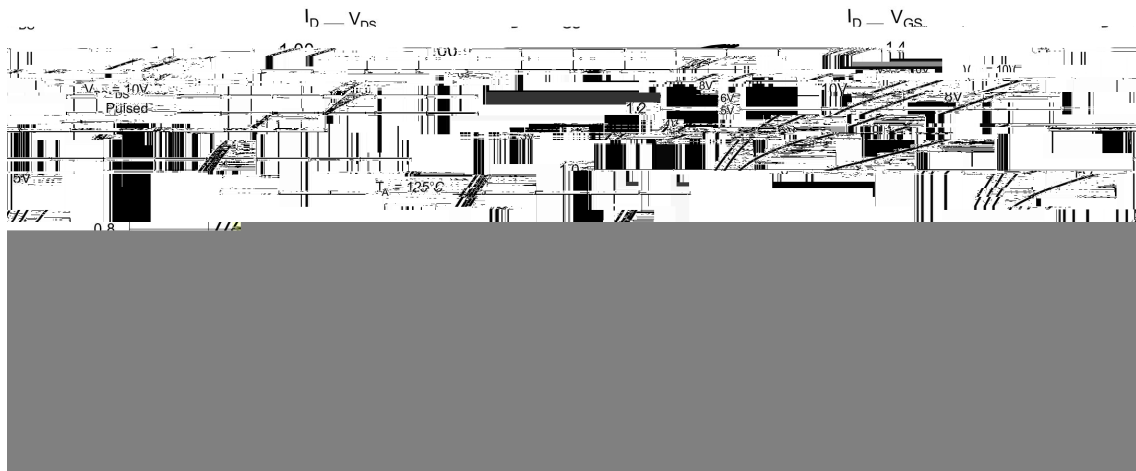



Rev.I May.-2022

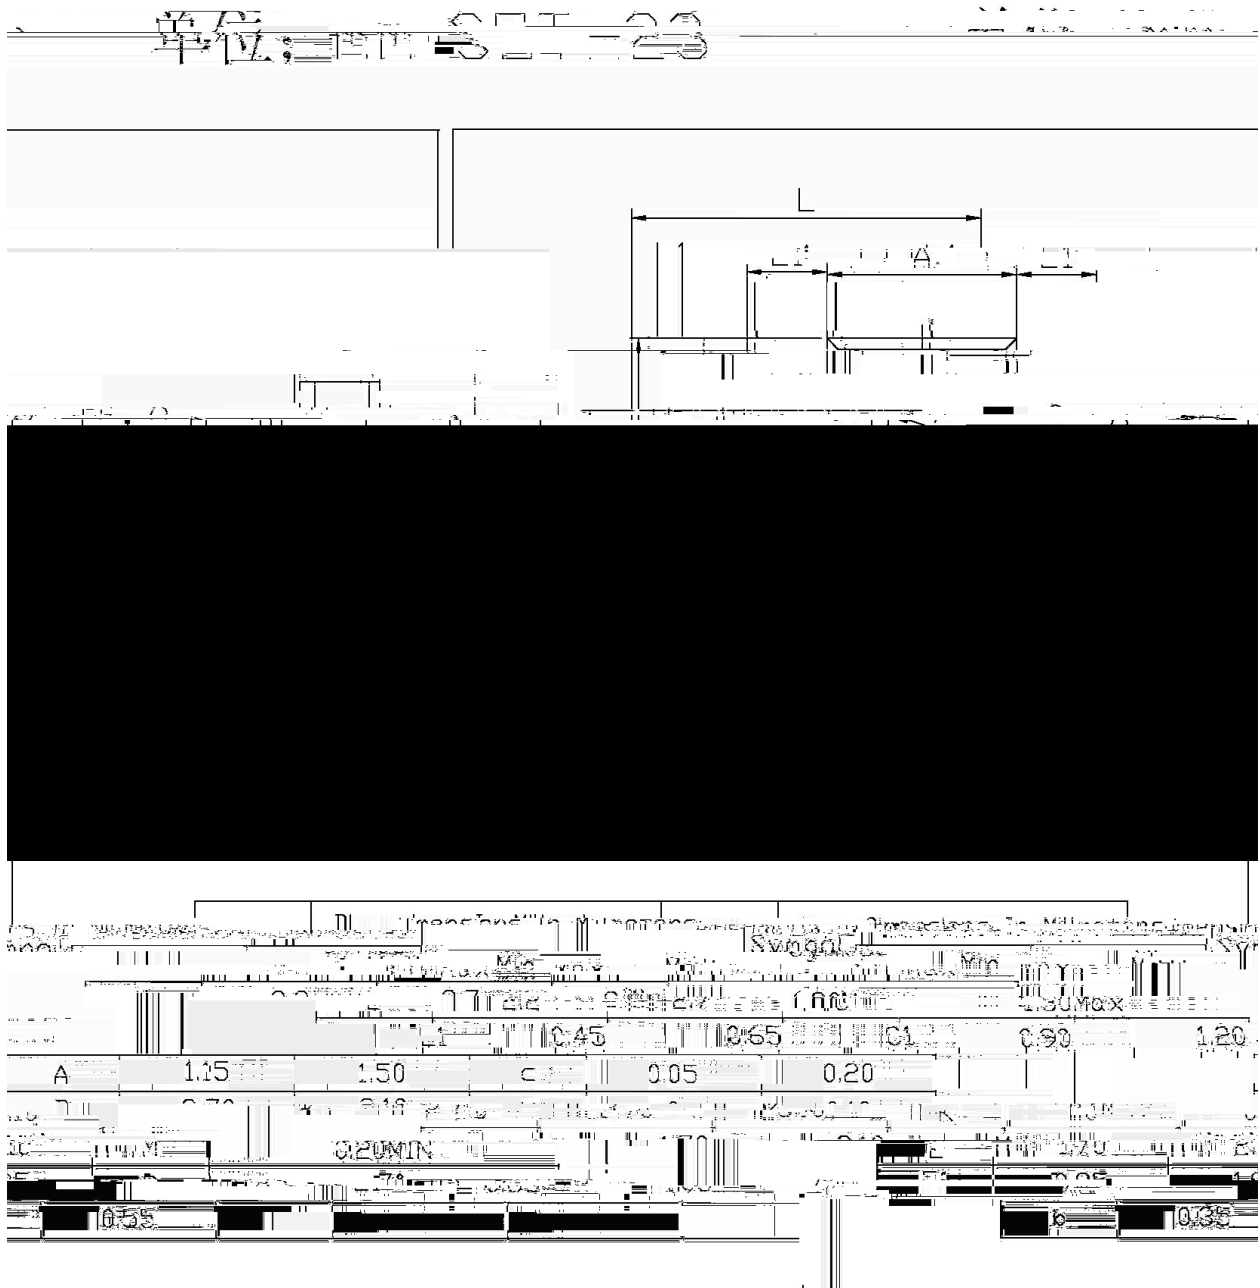



y z i

H i { | } ~ '

702 i { w m ~ '

Note:

H: Company Code

702: Product Type



1	150	180	60	90sec;	Note:	1.Preheating:150~180 , Time:60~90sec.
2	245±5			5±0.5sec;		2.Peak Temp.:245±5 , Duration:5±0.5sec.
3		2	10	/sec.		3. Cooling Speed: 2~10 /sec.

260±5 10±1 sec. Temp.:260±5℃ Time:10±1 sec

/ REEL

Package Type 封装形式	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units 包装数量 Units/Inner Box 只/盒	Dimension 包装尺寸 (unit: mm ³)
----------------------	--------------------	-------------------------	--------------------------------------	---