


BRCL4058FZR



DATA SHEET

/ Pinning

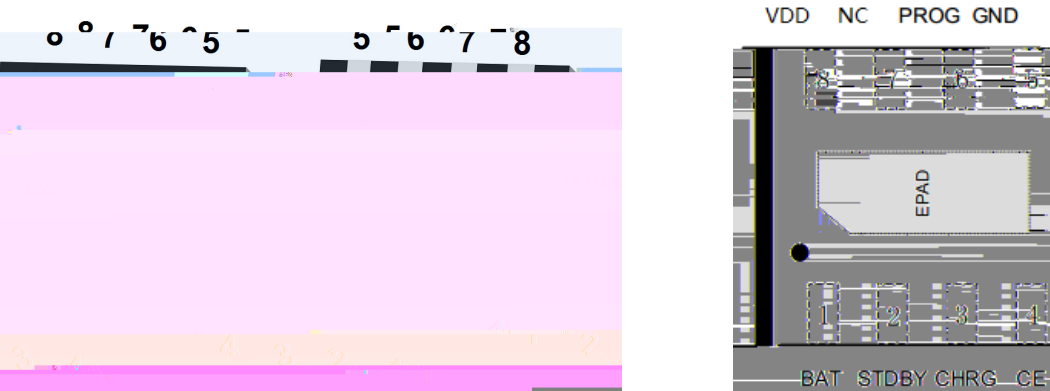


PIN Num.	Symbol	Function
	SUR J	

/ Absolute Maximum Ratings(Ta=25)

PARAMETER	SYMBOL	RATINGS	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
	Δ					
V _{CC} Under voltage	Δ					

/ Principle block diagram

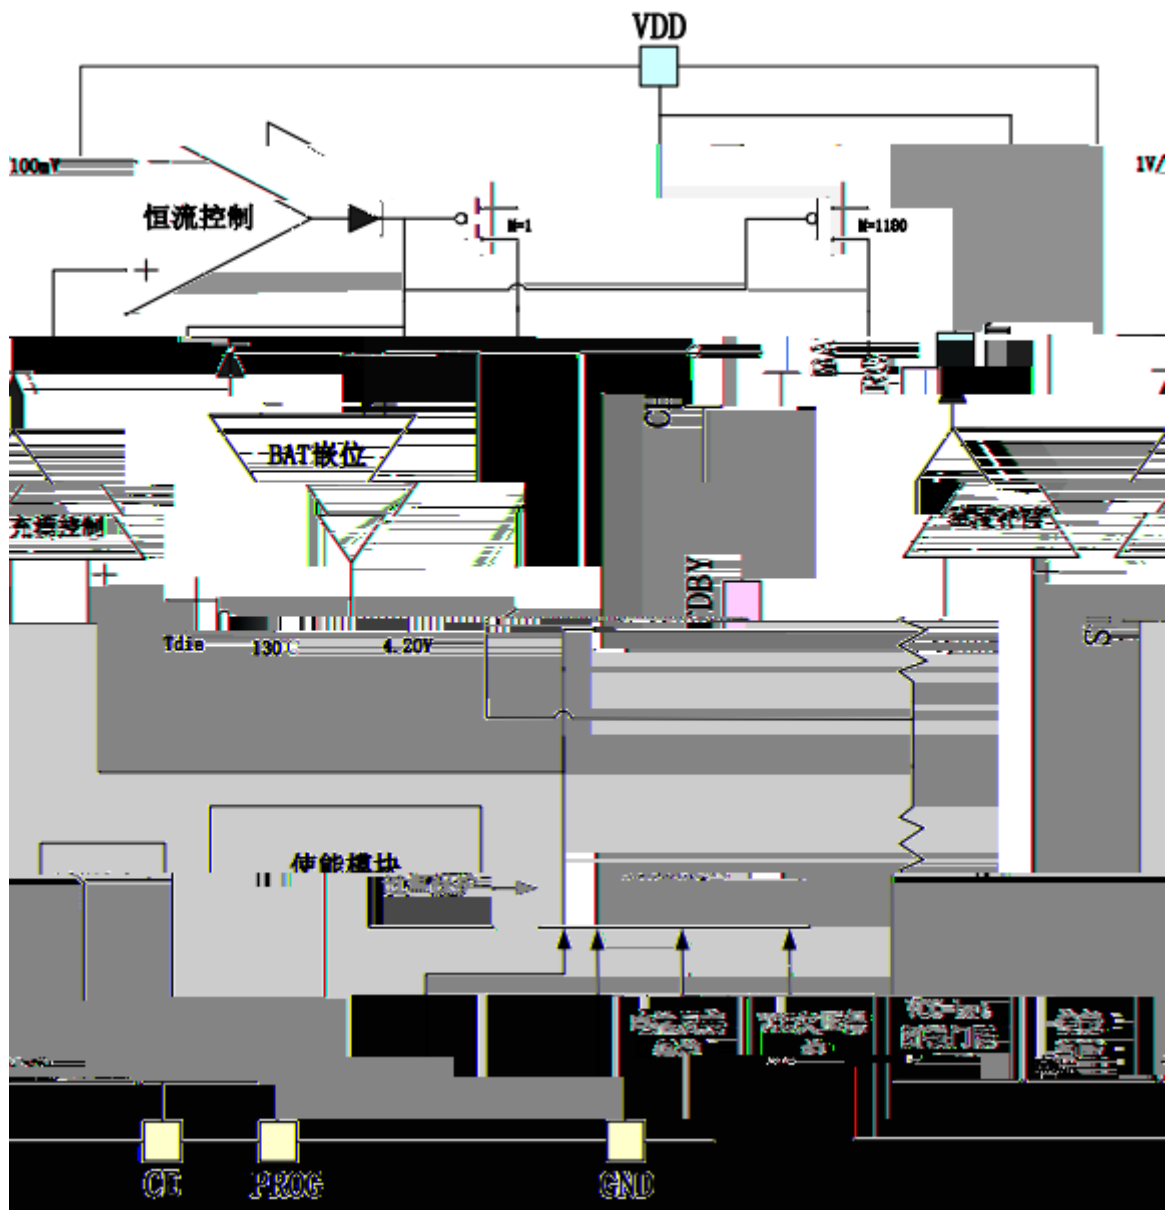

BRCL4058FZR



/ Function description


◆

3/8

◆


◆

/ Package Dimensions

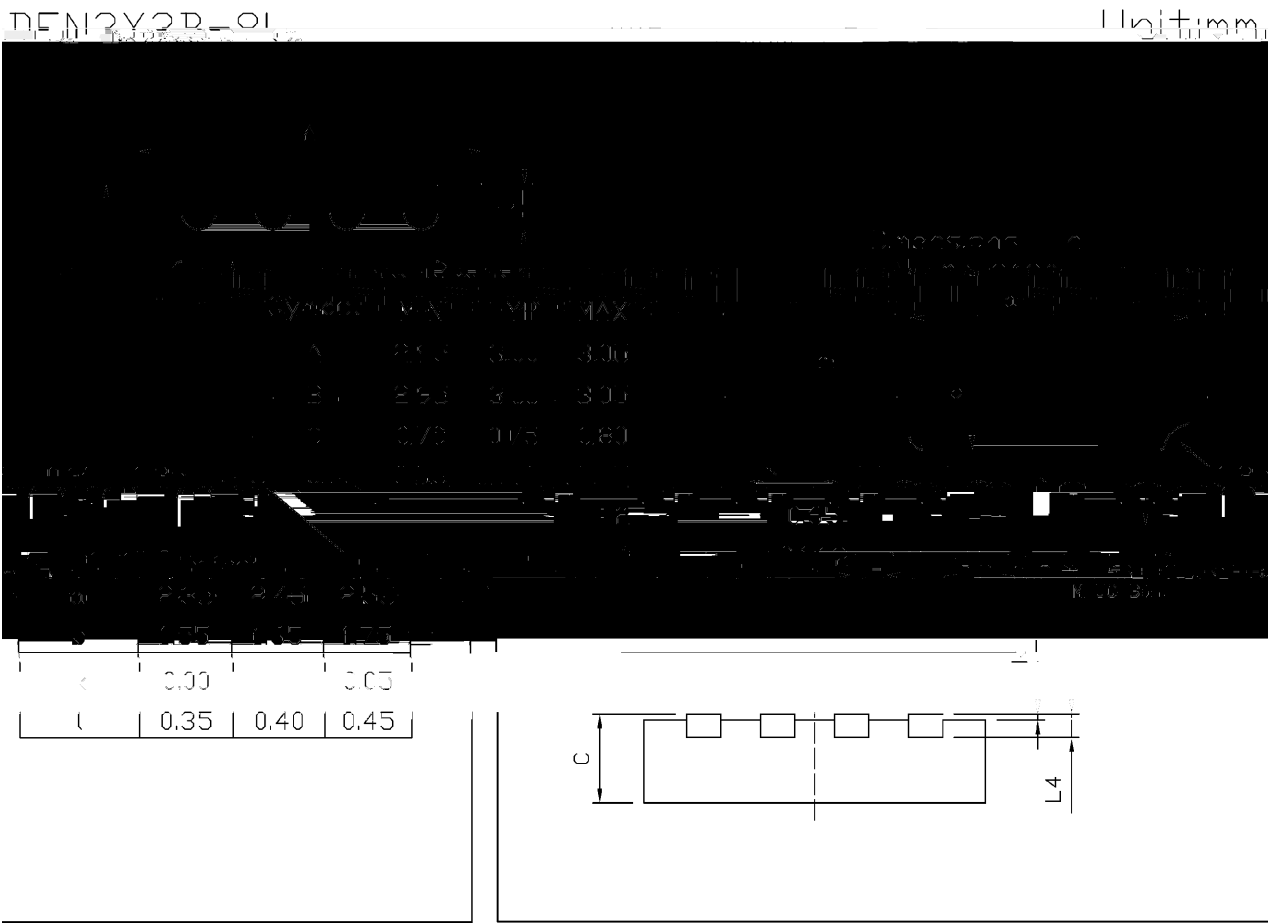

Rev.00 202006

() / Wh p shudwxuh Sur iloh i ru LU Uhior z V roghulq j +Se0l uhh,

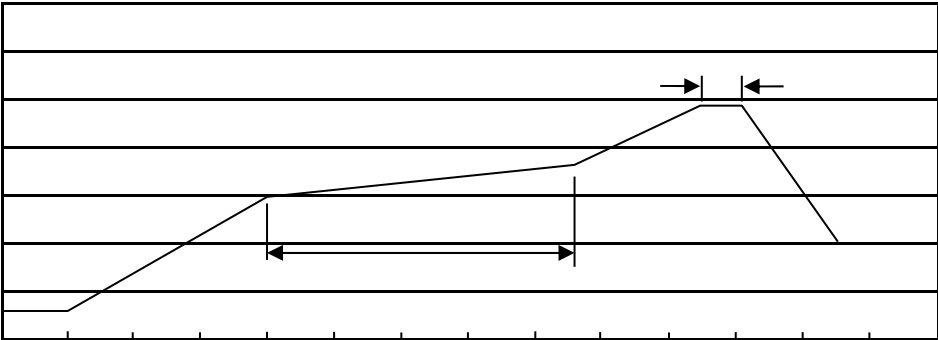

/ Resistance to Soldering Heat Test Conditions



/ Packaging SPEC.

/ Notices