


BRCL3130ME
R



DATA SHEET

--	--	--	--	--	--



/ Descriptions

```
6-78***!9:      ! " # $ % ; # & ' ( ) * + , - . / 0 1 2 3 4 5 6 7 8 9 6-78***!9: : ;
< = > 0 ? @ 9 / + : 4 A 1 B 4 0 + C D E + F G H I + F 9
6-78***!9: J K L M N O + / 4 * $ ( 0 O P A Q R S T U V L M W ' X Y Z [ \ ] ^ S L M N O ) *
+ , - X Y 9 6-78***!9: J K _ * A _ ` A _ a A b F c d K 0 + , d e f . / ? g A h i j k l
? l L M m 9 T n o p q q r s t u v w A x W Y Z y z e f # $ % { # & ' ( ) * + , | l \ } +
0 ~ ; ¢ £      0 X Y □ ' 9
R
```

R

R

/ Features


- ◆ ¥ | 2 3 c § (! 1 < 0 = > 0 ? @ 9 / + : 4 "
- ◆ © NOP + / 4 * \$("
- ◆ _ a . / " _ * + + a . / " « _ a . / ¬ _ ` + + a A ® ^ b F + a "
- ◆ * + U D E ¨ ! 3 + , * + ? g A H ° l \ ¥ | v ± A 1 B 4 + C D E ¨
- ◆ m ² 3 + a ¬ ´ M j k + a ¬ ≠ > ? ¨ µ t + a ¬ " : (> ? ¶ · - /) + G , ¹ ° » 9
- ◆ , ¼ 9 ½
- ◆
- ◆
- ◆
- ◆
- ◆
- R
- ◆
- ◆
- ◆
- R
- ◆

/ Applications

! n # \$ % + , - " # & ' (+ , - 9



¾ ¿ ¬
A"Bn o ? I p S© _ OP d À Á 0 Â Ã ? I 9
A BÄ J K Å ² + . / ? g AÆp f © _ Â Ã 0 À Á ² + g Ç 9
:



È É Ê Ë CDE 0 > 1 FGH	È É Ì Í CDE 0 I 1 G	È É Î Ï CDE . GJKHOLMNE
--------------------------	------------------------	----------------------------

"

Ô Õ	Ö Ë	Õ ×	! Ø
			°C
			°C
			°C
			°C
R	R		°C
	R		°C

Ô Õ	Ö Ë	E Ù Ú V	Â N ×	Û Ü ×	Â Ã ×	! Ø
R						
R	R					
	R					
		,				
R	R	,				
						°C
R						°C

BRCL3130ME
R

DATA SHEET

/ Overdischarge Condition

ć ´ M ` + \_ þ ĉ A Ć + , + C Ĩ õ \_ ` D E + C ĉ VDLČ ä Ć , h i ĉ Ď I \ đ õ _ ` + + C D E H I
I \ ĉ TDLČ { Đ | A



/ Abnormal Charge Current Detection

' M * + I A ò ó VM + C Ĩ ã * + D E + C ä Ê (VCHA) A h i ċ Ď I \ © _ _ * + a D E H I I \
 (TCU) ABRCL3130ME đ à * + FET Ē ē * + 9 Q ĵ æ ç Í r ø M * + + a D E 9
 à á * + U AVMGGND L \ + C 1 Z * + U D E + C (VCHA) I A ø M * + + a ạ Ć 5 è 9 Ą Z 0 V + ,
 * + ? g Ŏ = ǒ 1 Z p ' M + a * + D E A + , + C Ŏ m 0 + , ' ć > Ğ 0 V * + I A ø M * + + a D E
 Ą p j k 9

BRCL3130ME
R


/ Timing Chart



/Charger Detection

/Abnormal Charge Detection



/ Package Dimensions

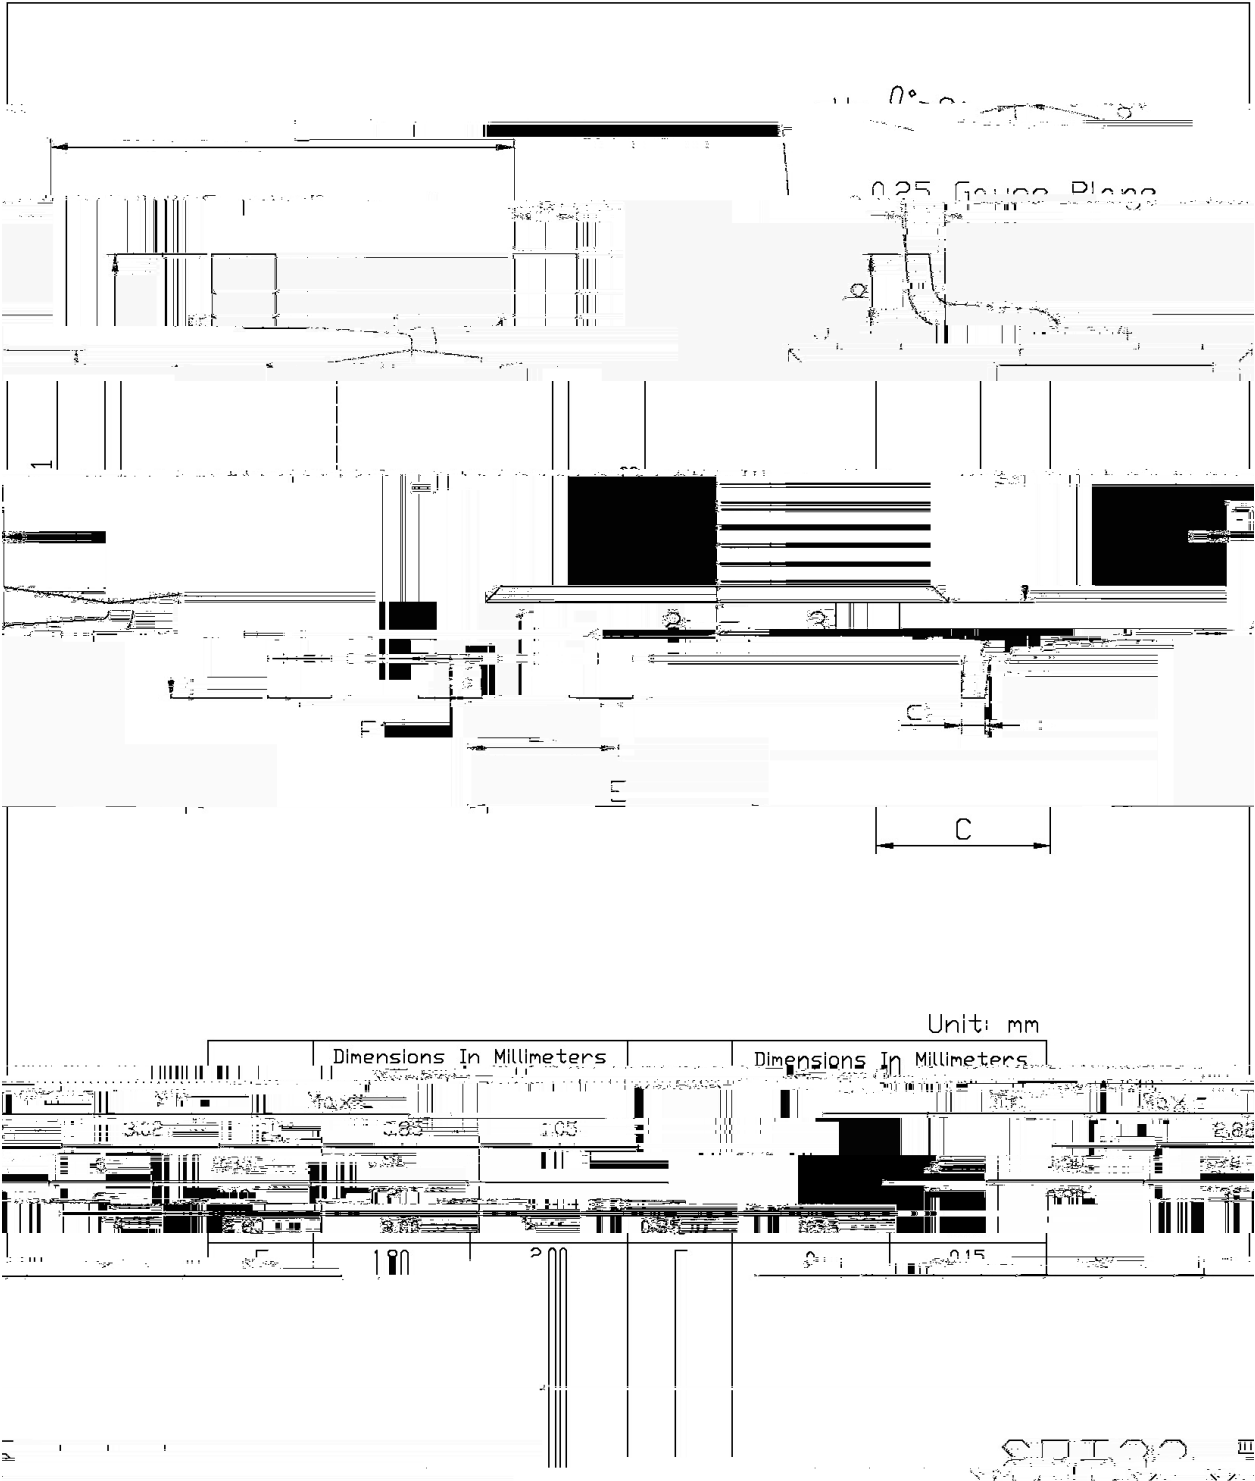

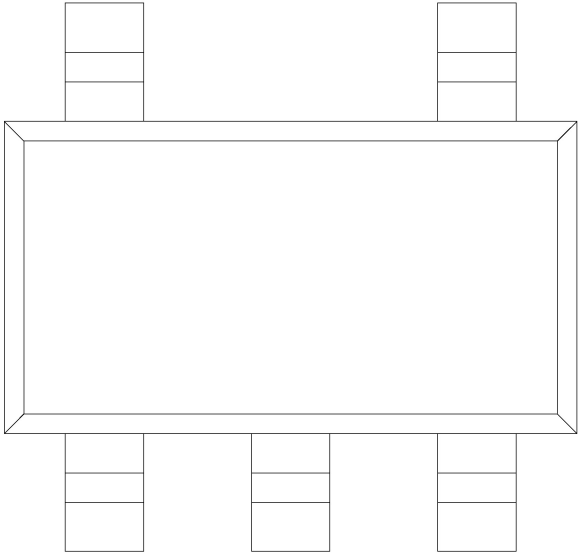



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

